

Job Name:

Contact:

Ordering Code:

Fixture Type:



Direct Connect



Standard three selectable CCT 3000K, 3500K, 4000K



BZ



WH

## Saber CCT Select

### Description

The Saber with CCT Select is a low profile, linear, line voltage, LED cove fixture with a white or bronze aluminum extrusion housing. It has highly efficient, color consistent LEDs with an SDCM of 3. A premium opal lens allows for smooth and even illumination eliminating pixelation and striations on the wall or surface below. The Saber is dimmable to 5% with integrated driver and is optimized for fast permanent installation. Plug-in or hardwire with flexible cable connectors offered. Switch boxes offered with Occupancy Sensor option. Selectable CCT options include 3000K, 3500K, 4000K.

### Housing

Extruded aluminum housing with white or bronze finish.

### Mounting

0-90° angle adjustable mounting brackets. (2) Mounting brackets included per fixture. (1) End to end connector included per fixture.

### Electrical/Controls

- 120Vac, 50-60Hz input
- Typical 750 lumen/foot or 75 lm/W
- Listing for hardwired and portable application
- Triac dimming (with standard dimmer)
- Linkable up to 300W
- Ambient operating temperature: -10°C to + 40°C

### LED Info

- LED: Samsung 2835
- CCT: 3000K, 3500K, 4000K selectable CCT
- CRI: > 90CRI (93 typ)
- Duv: +/- 0.001
- SDCM: 3-step MacAdam Ellipse
- Lumen Maintenance: L<sub>70</sub> > 50,000 hrs
- Warranty: 5 year limited fixture warranty


### Listings

- ETLus Listed to UL1598 and UL153 (suitable for dry locations only)
- cETL Listed to CSA C22.2 #250.0
- Energy Star Compliant
- IP20 rated


## Ordering Codes

Follow the steps to specify your fixture, example: **138513 - 12 - 3CCT - 90 - WH**

Part Number	Length	CCT & LM MULTIPLIER	CRI	Finish	LENGTH	LUMENS	WATT	
138513	12	3CCT 3000K (1.00)	90	90CRI	BZ bronze	12-7/16"	750lm	10W
	16					16-7/16"	950lm	13W
	24	4000K (1.03)			WH white	24-3/8"	1500lm	20W
						32	32-3/8"	2000lm



### Dimensions

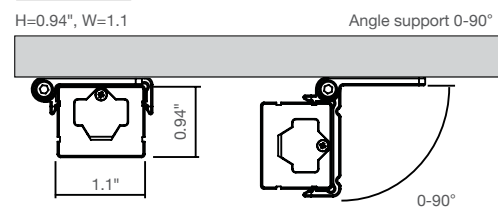

Job Name:

Contact:

Ordering Code:

Fixture Type:

## Accessories

- 138521BK 6" flexible connector, black
- 138522BK 12" flexible connector, black
- 138523BK 24" flexible connector, black
- 138524BK 72" flexible connector, black
  
- 138521WH 6" flexible connector, white
- 138522WH 12" flexible connector, white
- 138523WH 24" flexible connector, white
- 138524WH 72" flexible connector, white



**Flexible Connector**

Technical Specs:  
120Vac



**Plug-In Power Feed**

Technical Specs:  
120Vac



**Power Feed**

Technical Specs:  
120Vac

- 138527BK 72" plug-in feed, black
- 138527WH 72" plug-in feed, white

- 138526BK 72" power feed, black
- 138526WH 72" power feed, white

- 138519WH/120 terminating junction box, non switchable, white

- 138528BZ' switch box, bronze
- 138528WH' switch box, white

- 138529BZ' switch box with occupancy sensor, bronze
- 138529WH' switch box with occupancy sensor, white



**Switch Box with occupancy sensor**

Technical Specs:  
120Vac  
Multiple 1/2" knockouts  
Captive mounting screws  
Time Delay: 30 sec minimum  
Dimensions: 8-1/4"L x 1"H x 3-5/8"W  
Occupancy Timeout: 10 sec  
Sensing Distance: 3 ft  
Up to 300W on single box



**Switch Box**

Technical Specs:  
120Vac  
Multiple 1/2" knockouts  
Captive mounting screws  
Dimensions: 6-1/2"L x 1"H x 3-5/8"W  
Up to 300W on single box

**Notes**

1. 120V rocker switch included.
2. End-to-end connector included with each fixture.

**Connectors<sup>2</sup>**



**End-to-end**



**Terminating Junction Box**

Technical Specs:  
120Vac  
Multiple 1/2" knockouts  
Captive mounting screws  
Up to 300W on single box