

Job Name:

Contact:

Ordering Code:

Fixture Type:



# Versa LED Canopy Spot

## Description

VERSA is a line voltage canopy spot with manual beam control to the degree. With 25° to 60° design options built in, VERSA allows for simple adjustment by simply turning the snoot without changing reflectors or lens media. Delivering 114 lm/watt @ 90+ CRI using Citizen's latest LED

## Housing

Extruded aluminum housing with white or black finish. Adjustable snoot has pre-set beam indicators for 25, 40, and 60 degrees. Further refined beam control can be attained during hot-adjustment of snoot.

## Mounting

Canopy over a 3"-4" recessed round junction box

## Electrical

- 120Vac input, 50/60Hz, 18.4W/ 18.5VA
- Trailing Edge (ELV) dimming to less than 10%


## Listings

- ETLus Listed to UL1598 (suitable for dry locations only)
- cETL Listed to CSA C22.2 #250
- Made in the USA - meets the requirements for the Buy American provision within the ARRA

## Ordering Codes

Follow the steps to specify your fixture, example: 137430 - 21LM - 30K - 90 - 120 - ELV - bk - 3- MP

Part Number	Delivered Lumen	CCT	CRI	Voltage	Dimming	Finish	Stem Length	Mounting
137430	21LM 2110 lm	30K 3000K 35K 3500K	90 90 CRI	120 120V	ELV Trailing Edge (ELV) Dimming	bk black wh white	3 3-3/8" stem 28' 3"-28" stem	MP 4" Canopy

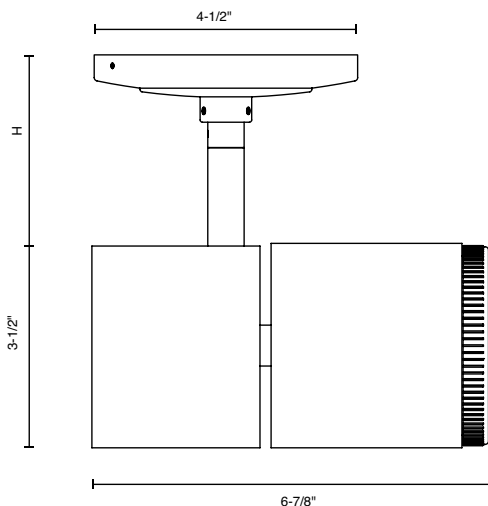

**Notes:**

H = 3-3/8" or 3" - 28" field cuttable; length may be specified in 1" increments at additional charge

1. Field cuttable to specific length; length may be specified in 1" increments at additional charge



LM-79

Job Name:

Contact:

Ordering Code:

Fixture Type:

## LED Performance

<b>LED</b>	Citizen CLU038-1208 ver.6
<b>SDCM</b>	3 step MacAdam Ellipse
<b>CCT</b>	3000K, 3500K
<b>CRI Ra</b>	92 typical
<b>Efficacy</b>	114 lumens/ watt (3500K)
<b>Life</b>	L80 > 102,000 hrs
<b>Warranty</b>	5 year limited fixture warranty

## Delivered Lumen (CCT vs. Beam)

Source Lumens	Beam Angle	3000K	3500K
21LM	20°	2050 lm	2080 lm
	40°	2000 lm	2030 lm
	60°	2080 lm	2110 lm

