



60" diameter version  
shown in Polished Chrome



# Patrícia-5

*Designed in 2015*

A complement to any commercial or residential space, the Patrícia-5 seamlessly combines innovation with simple, refined design. Its elegant aesthetic belies its robust construction. Solid wood walnut or barn wood tone blades revolve around a balanced, cylindrical DC motor housing. Air is circulated efficiently with barely more than a whisper. An eco-conscious LED light kit completes the package, making Patrícia-5 sophisticated, efficient and green. Constructed of cast aluminum and heavy stamped steel, the Patrícia-5 carries a limited lifetime warranty.



52" diameter version  
shown in Textured Bronze  
with optional light cap





42" diameter version  
shown in Brushed Nickel



52" diameter version  
shown in Textured Bronze


SKU NAMING CONVENTION		
SKU#	<b>PA5-XX-XX-XX</b> (Model+Finish+Blade+Diameter)	
Standard Finishes	Brushed Nickel	- <b>BN</b>
	Polished Chrome	- <b>CR</b>
	Textured Bronze	- <b>TB</b>
Special Order	Gloss White	- <b>WH</b>
	Matte Black	- <b>BK</b>
Blade Finish	Barn Wood Tone	- <b>BW</b>
	Walnut Tone	- <b>WA</b>
Fan Diameter	42 inches / 107 cm	- <b>42</b>
	52 inches / 132 cm	- <b>52</b>
	60 inches / 152 cm	- <b>60</b>

STANDARD EQUIPMENT	
One downrod of 10 inches / 13 cm	
Vaulted ceiling canopy for up to 30°	
6-speed RF remote control with reverse function in black	Wireless Decora-style, 6-speed, wall control in white
	

CEILING HEIGHT / DOWNROD TABLE	
Ceiling Height	Downrod Lengths <i>Field cuttable. Non-threaded</i>
10 ft or less	5 inches / 13 cm
10 -12 feet	10 inches / 25 cm
13 feet	20 inches / 51 cm
14 feet	30 inches / 76 cm
15 feet	48 inches / 122 cm
16 feet +	72 inches / 183 cm

CEILING PITCH TABLE	
0/12	0 degrees
1/12	4.76 degrees
2/12	9.46 degrees
3/12	14.04 degrees
4/12	18.43 degrees
5/12	22.62 degrees
6/12	26.57 degrees
7/12	30.26 degrees
8/12	33.69 degrees
9/12	36.87 degrees
10/12	39.81 degrees
11/12	42.51 degrees

# Patrícia-5 | TECHNICAL SPECIFICATIONS

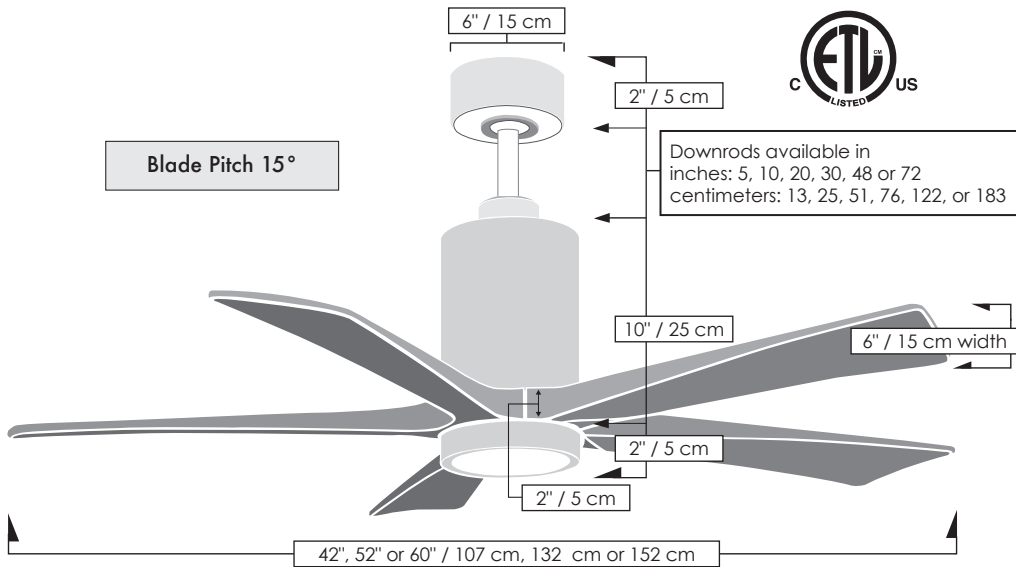

FAN SPECIFICATIONS						
Fan Diameters	inches: 42, 52 or 60 centimeters: 107, 132 or 152					
Overall Drop	12 inches / 30 cm + downrod length					
Fan Weight	19 lbs					
Downrods Lengths <i>Field cuttable. Non-threaded</i>	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183					
Downrod Diameter	1 inch					
Voltage	110 (Please contact us for 220 conversion)					
Motor Type	DC					
Remote Control	Hand-held, wall-mountable, 6-speed with reverse					
Wall Control	Decora-style wall control: DC-WC					
Environment	Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible					
Ambience	Silent					
Safety Certification	ETL / CETL					
Warranty	Limited Lifetime					
MOTOR EFFICIENCY DATA AT HIGH SPEEDS						
	42 inch / 107 cm	52 inch / 132 cm	60 inch / 152 cm			
RPM	221	186	87			
CFM	4385.74	5524.13	5546.78			
Watts	30.47	31.80	31.64			
CFM/Watt	143.94	173.71	175.31			
Blade Pitch	15°	15°	15°			
LIGHT KIT PHOTOMETRICS						
Lamping (Replaceable)	Remote Dimmable	Temperature	Delivered Lumens	CRI	Watts	Hours
Integrated LED	Yes	3075 K	690	90	16	60,000

